

Bimetal top attachment
thermometer


H 008-A



Bimetal top attachment thermometer

Bimetal thermometer for regulating valves and valves in hot water floor heating pipes.

Application:	Heating and sanitation systems
Nominal size:	34 mm
Housing:	Sheet steel, nickel-plated
Push on bezel:	Sheet steel, nickel-plated
Pot:	Brass with adjusting device
Dial:	plate-scale with pulled up edge as screen
Window:	Plastic / Instrument glass
Scale:	<ul style="list-style-type: none"> ◆ black ◆ dyed scale ◆ °C/°F on request
Measuring element:	Bimetal helix
Measuring range:	0+50°C, 0+60°C, 0+80°C, 0+120°C, 0+100°C/°F in red/blue
Accuracy:	class 2 (DIN 16203 / DIN EN 13190)

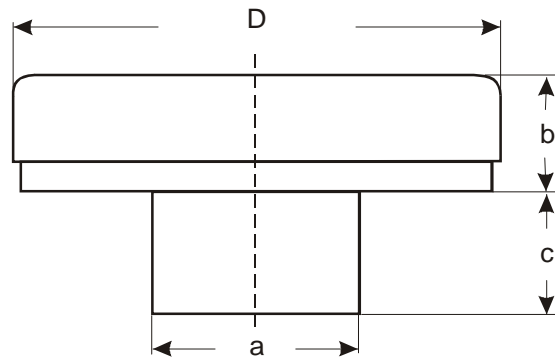

Nominal size (D)	a	b	c
34	15	8	9

Details

We can offer further versions and special remarks on request.

[Technical changes reserve](#)



Thermobau Wirthwein KG
Walter-Wirthwein-Straße 12
D-97993 Creglingen
Tel: +49 (0) 7933 9900-30
Fax: +49 (0) 7933 9900-32
www.thermobau-wirthwein.de
mail@thermobau-wirthwein.de