



## Bimetal top attachment thermometer

H 008-A

### Bimetal top attachment thermometer

Bimetal-thermometer for regulating valves and valves in hot water floor heating pipes.


Application:	Heating and sanitation systems
Nominal size:	34 mm
Housing:	Sheet steel, nickel-plated
Push on bezel:	Sheet steel, nickel-plated
Pot:	Brass with adjusting device
Dial:	plate-scale with pulled up edge as screen
Window:	Plastic / Instrument glass
Scale:	<ul style="list-style-type: none"> <li>◆ black</li> <li>◆ dyed scale</li> <li>◆ °C/°F on request</li> </ul>
Measuring element:	Bimetal helix
Measuring range:	0+50°C, 0+60°C, 0+80°C, 0+120°C, 0+100°C/°F in red/blue
Accuracy:	class 2 (DIN 16203 / DIN EN 13190)

Bimetal top attachment  
thermometer

H 008-A

**Bimetal top attachment  
thermometer**

Bimetal-thermometer for  
regulating valves and valves in  
hot water floor heating pipes.

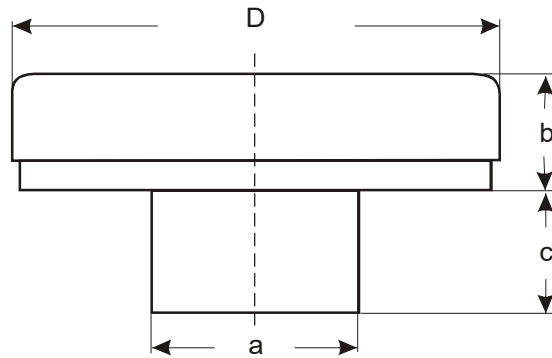

Nominal size (D)	a	b	c
34	15	8	9

Size in mm

Details

We can offer further versions and special remarks on request.

[Technical changes reserve.](#)