



Pricking thermometer

H 022

With cone point for pricking

- Impermeable to splash water -

Bimetal-thermometer for temperature measurement in food and drinks

Application:	Catering, food industry, household
Nominal size:	63 mm
Stem length:	100 – 300 mm
Immersion Stem:	Centrally backwards, stainless steel 1.4301 cibe point Ø 6 mm
Housing:	Flange housing VA; stainless steel 1.4301
Push on bezel:	Stainless steel 1.4301
Dial:	Sheet steel, silver/white coated, black printed
Pointer:	Aluminum black
Window:	Instrument glass
Measuring element:	Bimetal helix
Measuring range:	0+60°C, 0+120°C
Accuracy:	Class 2 (DIN 16203 / DIN EN 13190)
Options	♦ Other stem lengths with folding hand grip


Pricking thermometer

H 022

With cone point for pricking

- Impermeable to splash water -

Bimetal-thermometer for temperature measurement in food and drinks

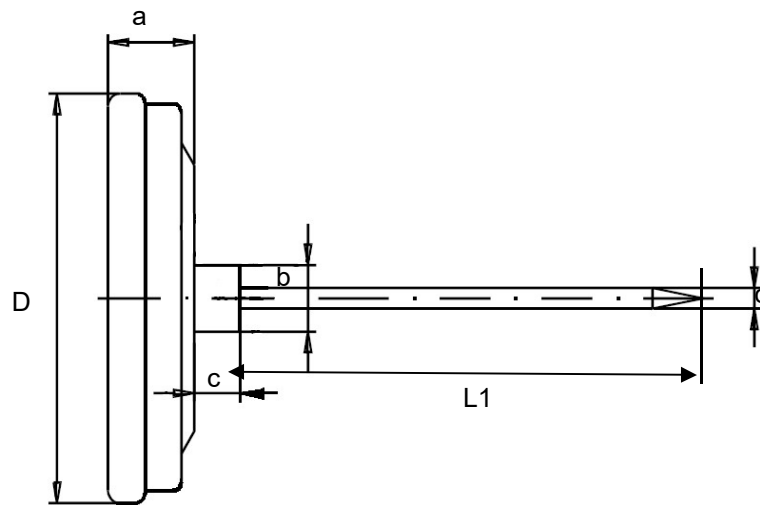

Nominal size (D)	a	b	c	d	L1
63	13	13	12,5	6	100 – 300

Size in mm

Details

We can offer further versions and special remarks on request.

[Technical changes reserve.](#)